



CNCentralizer Technology Limited

www.cncentralizer.com



Φ24 PVC Centralizer




Material: U-PVC (聚氯乙烯)

Thickness: $\geq 2\text{mm}$

Standard: ASTM D1599

Model	ID (mm)	OD (mm)	Length	Weight	Package
2460	24	60	≥ 150	~60g	100pcs
2470	24	70	≥ 150	~61g	100pcs
2480	24	80	≥ 155	~62g	100pcs
2490	24	90	≥ 160	~63g	100pcs
24100	24	100	≥ 160	~65g	100pcs
24120	24	120	≥ 165	~75g	100pcs
24135	24	135	≥ 165	~88g	100pcs
24145	24	145	≥ 170	~90g	100pcs
24155	24	155	≥ 170	~92g	100pcs
24165	24	165	≥ 180	~95g	100pcs
24175	24	175	≥ 180	~98g	100pcs

Others size can be made by order.





Φ30 PVC Centralizer




Material: U-PVC (聚氯乙烯)

Thickness: $\geq 2\text{mm}$

Standard: ASTM D1599

Model	ID (mm)	OD (mm)	Length	Weight	Package
3060	30	60	≥ 150	~60g	100pcs
3070	30	70	≥ 150	~61g	100pcs
3080	30	80	≥ 155	~62g	100pcs
3090	30	90	≥ 160	~63g	100pcs
30100	30	100	≥ 160	~65g	100pcs
30120	30	120	≥ 165	~75g	100pcs
30135	30	135	≥ 165	~88g	100pcs
30145	30	145	≥ 170	~90g	100pcs
30155	30	155	≥ 170	~92g	100pcs
30165	30	165	≥ 180	~95g	100pcs
30175	30	175	≥ 180	~98g	100pcs

Others size can be made by order.





Φ36 PVC Centralizer




Material: U-PVC (聚氯乙烯)

Thickness: $\geq 2\text{mm}$

Standard: ASTM D1599

Model	ID (mm)	OD (mm)	Length	Weight	Package
3660	36	60	≥ 150	~60g	100pcs
3670	36	70	≥ 150	~61g	100pcs
3680	36	80	≥ 155	~62g	100pcs
3690	36	90	≥ 160	~63g	100pcs
36100	36	100	≥ 160	~65g	100pcs
36120	36	120	≥ 165	~75g	100pcs
36135	36	135	≥ 165	~88g	100pcs
36145	36	145	≥ 170	~90g	100pcs
36155	36	155	≥ 170	~92g	100pcs
36165	36	165	≥ 180	~95g	100pcs
36175	36	175	≥ 180	~98g	100pcs

Others size can be made by order.





Φ42 PVC Centralizer




Material: U-PVC (聚氯乙烯)

Thickness: $\geq 2\text{mm}$

Standard: ASTM D1599

Model	ID (mm)	OD (mm)	Length	Weight	Package
4280	42	80	≥ 150	~80g	50pcs
4290	42	90	≥ 150	~82g	50pcs
4295	42	95	≥ 155	~85g	50pcs
42100	42	100	≥ 155	~87g	50pcs
42110	42	110	≥ 160	~89g	40pcs
42120	42	120	≥ 160	~91g	40pcs
42130	42	130	≥ 160	~92g	40pcs
42145	42	145	≥ 165	~95g	40pcs
42150	42	150	≥ 165	~97g	40pcs
42165	42	165	≥ 165	~98g	40pcs
42175	42	175	≥ 165	~99g	40pcs

Others size can be made by order.





Φ48~100 PVC Centralizer




Material: U-PVC (聚氯乙烯)

Thickness: ≥2mm

Standard: ASTM D1599

Model	ID (mm)	OD (mm)	Length	Weight	Package
48100	48	100	≥150	~100g	40pcs
48120	48	120	≥150	~105g	40pcs
48150	48	150	≥155	~110g	40pcs
57100	57	100	≥150	~110g	40pcs
57120	57	120	≥155	~120g	40pcs
57150	57	150	≥160	~130g	40pcs
69100	69	100	≥160	~120g	40pcs
69120	69	120	≥165	~130g	40pcs
69150	69	150	≥165	~140g	40pcs
103120	103	120	≥170	~150g	30pcs
103150	103	150	≥175	~160g	30pcs

Others size can be made by order.





Strand centralizer



Model	Strand	OD (mm)	thick	pack
SC2	2	54	≥20mm	200pcs/ctn
SC4	4	60	≥20mm	200pcs/ctn
SC5	5	72	≥20mm	200pcs/ctn
SC7	7	72	≥20mm	100pcs/ctn
SC12	12	94	≥20mm	100pcs/ctn
SC19	19	120	≥20mm	100pcs/ctn
SC22	22	120	≥20mm	100pcs/ctn
SC24	24	120	≥20mm	100pcs/ctn

Material: HDPE (高密度聚乙烯)



Marketing Director: Felix Lee





Corrugated Sheathing for DCP anchor



Model	ID (mm)	OD (mm)	thick	Length	Weight
CS5065	50	65	≥2mm	150m/coil	600g/m
CS6585	65	85	≥2mm	150m/coil	750g/m
CS80100	80	100	≥2mm	120m/coil	900g/m
CS100125	100	125	≥2mm	100m/coil	1100g/m

Material: HDPE (高密度聚乙烯)

Standard: ASTM D1599 / ASTM D3350

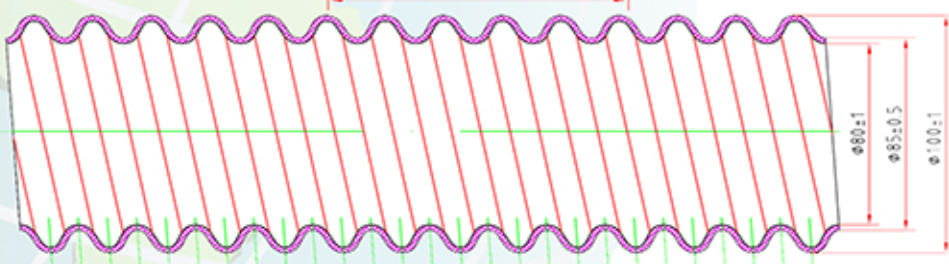




Corrugated Sheathing 80/100 for DCP anchor



Model	ID (mm)	OD (mm)	thick	Length	Weight
CS80100	80	100	≥2mm	120m/coil	900g/m

Material: HDPE (高密度聚乙烯)

ID:29mm/OD:121mm

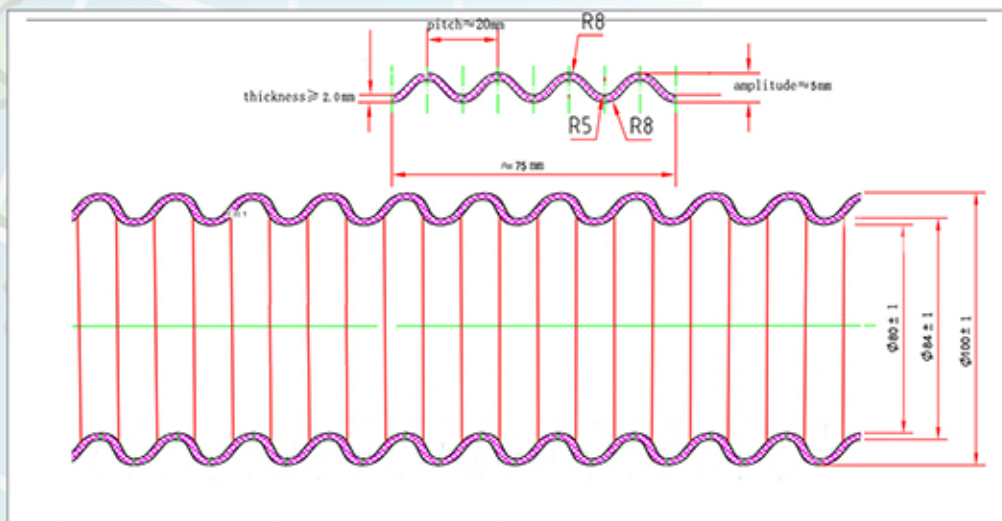



Grout tube (HDPE)

Model	ID (mm)	OD (mm)	Length	Weight	Package
1620	16	20	200m/coil	~10kg	
1721	17	21	200m/coil	~11kg	
1822	18	22	200m/coil	~12kg	

Material: HDPE

Thickness: $\geq 2\text{mm}$


Stand Pressure: $\geq 3\text{MPa}$

Others size can be made by order.





Slot Drain Pipe




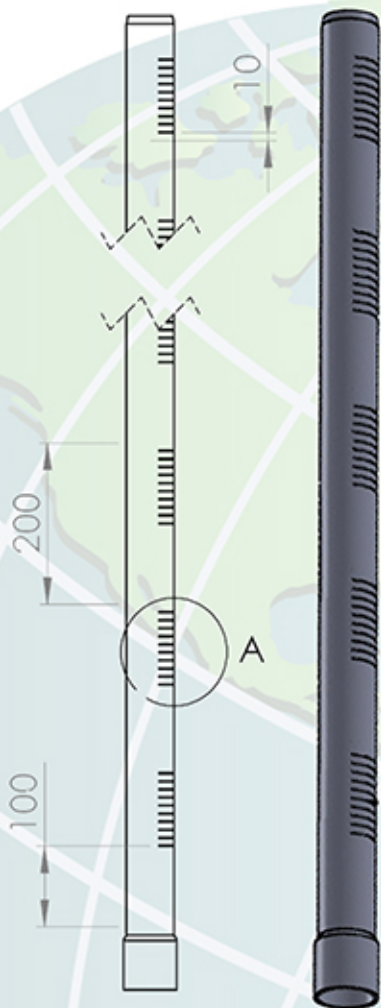


Model	ID (mm)	OD (mm)	Length	Weight	Package
SDP50	44	50	free	400g/m	free
SDP63	57	63	free	550g/m	free
SDP75	69	75	free	600g/m	free

Material: PVC (聚氯乙烯)

Thickness: $\geq 3\text{mm}$

Size can be made by order.

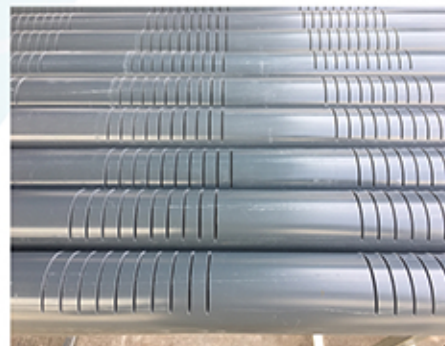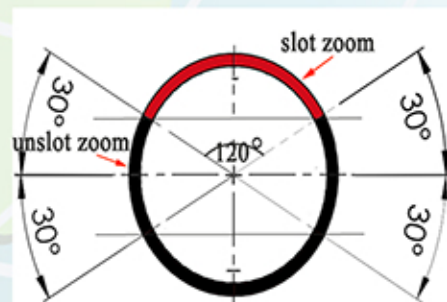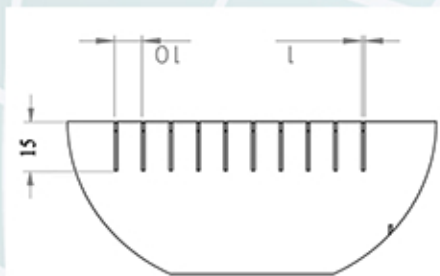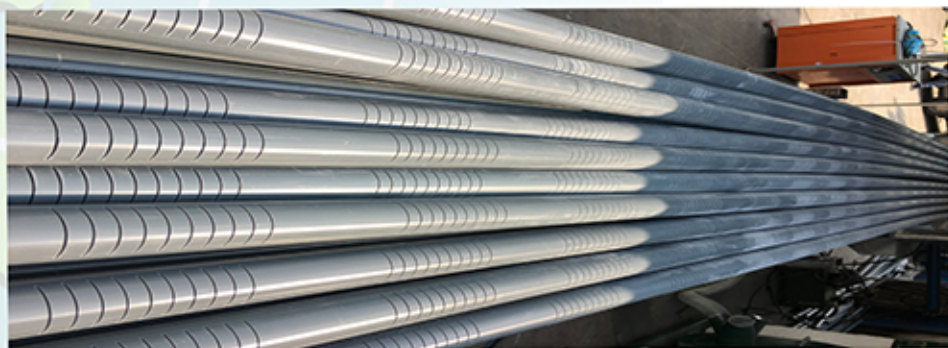



15.7mm Strand

Model OD (mm) Strand No. Length Weight
15.7 15.7mm 7 ~3000m/coil ~2700kg/coil


Material: Prestressing Strand (钢绞线)

Manufacturer :Hunan Xianghui Metal Products Co Ltd.

Standard: AS/NZS 4675

Table 12: BS 5896

Steel Grade	Diameter mm	Tensile Strength MPa	Cross sectional area mm ²	Mass/ Metre g/m	Permitted deviation on mass per metre %	Fm kN	Fm max kN	Fp0.1 kN
Y1860S7	15.7	1860	150	1172	+/- 2	279	321	246



Marketing Director: Felix Lee